


(Ev) Lunghezza estesa

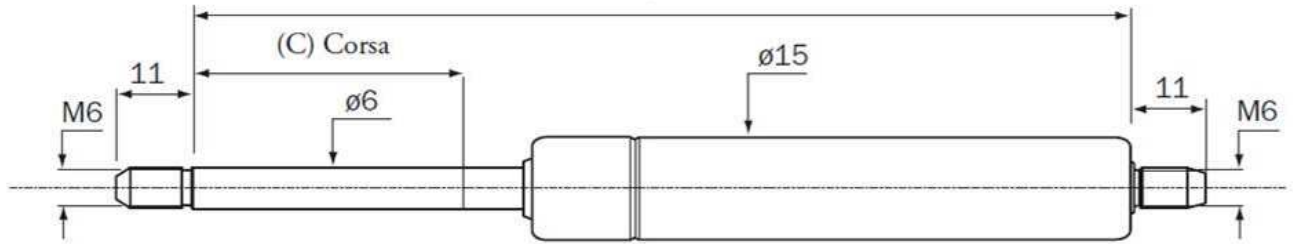

C (mm)	Ev(±2mm) (mm)	CARICO F1 (N) Incremento = 50N	REFERENZE		R
			Stelo cromato	Stelo nitruato	
40	115	50 → 400	563400	563456	1,25
60	155	50 → 400	563401	563457	1,25
80	195	50 → 400	563402	563458	1,25
100	235	50 → 400	563403	563444	1,30
120	275	50 → 400	563404	563459	1,30
150	335	50 → 350	563405	563460	1,30

TOLLERANZA SU F1

Carico F1 (N)	50 < F1 ≤ 250	250 < F1 ≤ 750	750 < F1 ≤ 1250	F1 > 1250
Tolleranza (N)	± 20	± 30	± 40	± 50

SEDI	PLASTICA REF 92722	METALLO-PLASTICA REF 72421	ACCIAIO A=20 REF 92216 A=25 REF 92220	ACCIAIO montato con rondella 93971 REF 92218
	SEDE REF 92721	ROTOLO REF 92990	Codifica per ordinare : Esempio : Corsa = 120 mm F1 = 300N Stelo cromato Attacco Ref. 92216 su Stelo Attacco Ref. 92220 su Cilindro Scrivere : (AX06) 120-300N-563404-92216/92220	
ANELLI	PLASTICA REF 92528	PLASTICA REF 92522	PLASTICA REF 92521	ZAMA REF 92259

SORservice